



iQ700, wall-mounted cooker hood, 90 cm, clear glass black printed LC91KWW60

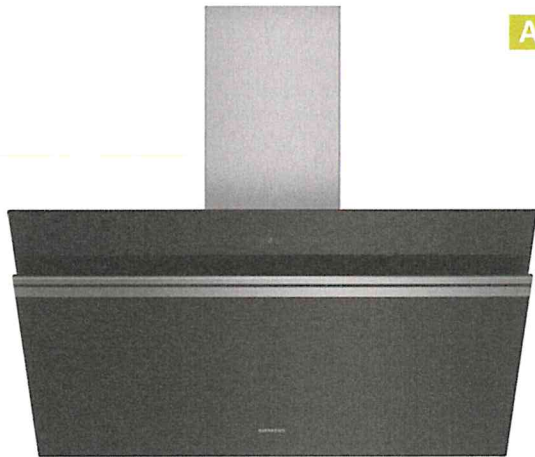

A+

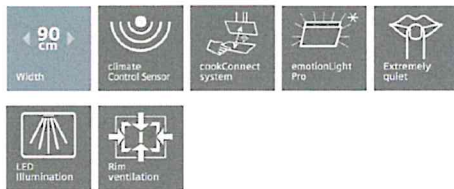

Accessori opzionali

LZ31XXB16	Clean Air Plus odor filter (replacement)
LZ11AXE61	Chimney standard black
LZ11AXC56	Clean Air Plus recirc. kit external
LZ10AXL50	Chimney extension 1500 mm
LZ10AXK50	Chimney extension 1000 mm
LZ10AKU00	Standard recirculation kit
LZ10AKT00	Standard recirculation kit (chimless)
LZ10AKS00	Long Life recirculation kit
LZ10AKR00	Long Life recirculation kit (chimless)
LZ10AKA00	Standard odor filter (replacement)
LZ00XXP00	Long Life odor filter (replacement)

Angled extractor hood with outstanding design and high extraction rate for a powerful performance.

- ✓ Powerful and quiet steam extraction – iQdrive motor
- ✓ Detects steam and odours to adjust the power level automatically – climateControl sensor with cookConnect system
- ✓ Highlight your kitchen – emotionLight Pro.
- ✓ Access and control your hood, no matter where you are - Home Connect App (Android and iOS)
- ✓ Optimal visibility and atmosphere when cooking - LED light.
- ✓ Calms the cooking process -#Extremely quiet
- ✓ Intensive setting starts automatically when you need it – Intensive setting with automatic revert.
- ✓ The power level and the LED light can be selected directly – touchControl

Caratteristiche

Dati tecnici

Typology : Chimney
 Approval certificates : CE, Eurasian, VDE
 Length electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 323
 Net weight (kg) : 25.312
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m3/h) : 525
 Boost position output recirculating (m3/h) : 624.0
 Boost position air extraction (m³/h) : 991
 Number of lights : 2
 Noise level (dB) : 58
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 10M
 Optional accessories : LZ00XXP00, LZ10AKA00, LZ10AKR00, LZ10AKS00, LZ10AKT00, LZ10AKU00, LZ10AXK50, LZ10AXL50, LZ11AXC56, LZ11AXE61, LZ31XXB16
 Type of lamps used : LED
 Grease filter type : Kasette
 Connection Rating (W) : 270
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : Gardy plug w/ earthing
 Installation typology : Wall-mounted
 Material body : Glass, Lacquered
 Approval certificates : CE, Eurasian, VDE
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 27.16 x 29.13 x 40.94
 Net weight (lbs) : 56
 Gross weight (lbs) : 73
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord (cm) : 130
 Dimensions of the product, with chimney (if exists) (mm) : 454 x 890.0 x 499.0
 Dimensions of the packed product (HxWxD) (mm) : 690 x 740 x 1040
 Net weight (kg) : 25.312
 Gross weight (kg) : 33.3



iQ700, wall-mounted cooker hood, 90 cm, clear glass black printed LC91KWW60

Caratteristiche

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 38.5 kWh/year
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- Noise min./max. Normal Level: 45/58 dB

Variant:

Design:

Technical information

Performance

Power:

Environment and safety:

Comfort:

Measures:

Technical information

- Inclined Hood black
- 90 cm
- Home Connect for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- 89 cm Chimney hood, black
- Glass plate: clear glass black printed
- Boost function
- Suitable for ducted or re-circulated extraction
- In recirculation operation chimless use possible
- For recirculated extraction a standard recirculation kit or a Clean Air recirculation kit (accessory) is needed
- Wall mounted hood

Home Connect (only in countries where Home Connect service is available)

- Cooktop-based hood control (with matching cooktop)
- fully automatic hood, Cooktop-based hood control
- easy wall fixing system
- PowerBoost position
- touchControl
- T55-SE7E
- T55-SE7E (3 speeds plus 2 intensive) with Electronic display, 2x7-segment display
- Electronic controls
- 3 speeds plus 2 intensive
- Automatic 10 minutes after running
- 2 capture areas: front side and bottom side
- Automatic revert setting, 6 minutes
- easy to clean Innerframe
- Air quality sensor
- Ambient light RGB

- Light dimmer function
- softLight
- Twin channel high performance fan motor
- Efficient BLDC-technology
- 2 x 3W LED
- Light Intensity: 519 lux
- Colour Temperature: 3500 K
- RimVentilation
- Saturation indicator for grease filter and odor filter
- Filter cover glass
- Metal grease filter, dishwasher safe
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 525 m³/h Intensive 991 m³/h
- Extraction rate exhaust air according to EN 61591 max. 991 m³/h
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 525 m³/h Intensive 991 m³/h
- Extraction rate exhaust air according to EN 61591: max. normal use 525 m³/h, intensive 991 m³/h
- Noise level according to EN 60704-2-13 at max. normal use exhaust air: Noise, max. speed in normal use: 58 dB dB(A) re 1 pW
- Noise level according to EN 60704-2-13 exhaust air: Max. normal use: 58 dB(A) re 1 pW Intensive: 71 dB(A) re 1 pW
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- with one-way flap
- Max. extraction rate: 991 m³/h
- Extraction rate in recirculation mode: Max. normal use: 447 m³/h Intensive: 624 m³/h
- Noise levels in recirculation mode: Max. normal use: 69 dB(A) re 1 pW Intensive: 78 dB(A) re 1 pW
- Power rating: 270 W
- Dimensions exhaust air (HxWxD): 930-1200 x 890 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 990-1260 x 890 x 499 mm
- Dimensions recirculating, chimless (HxWxD): 454 mm x 890 x 499 mm
- Dimensions recirculating with CleanAir Plus recirculation kit (HxWxD): 1120 x 890 x 499 mm - mounting with outer chimney 1190-1460 x 890 x 499 mm - mounting with telescopic chimney 1120 x 890 x 499 mm - mounting with outer chimney 1190-1460 x 890 x 499 mm - mounting with telescopic chimney

* In accordance with the EU-Regulation No 65/2014

iQ700, wall-mounted cooker hood, 90 cm, clear glass black printed LC91KWW60

Disegni quotati

